

## DURATION SERIES VRLA BATTERY

By combining up-to-date DCP-II formula in the positive plates and enhanced electrolyte for VRLA, BSB created an innovative range of DC batteries. This range features deep cycling use with higher cyclic life when compared with the standard Duration range. This series is highly suited to cyclic applications such as outdoor applications, small RE systems and electric vehicles.

**12 V** voltage    **120Ah** capacity    **AGM** tech    **Enhanced deep cycling**

### TECHNICAL SPECIFICATIONS


Nominal Voltage (V)	12 (6 cells per unit)
Designed Floating Life (20°C)	12 Years
Nominal Capacity (20°C)	120 Ah @ 10HR-rate (to 1.80Vpc)
Dimension (mm)	L406mm x W174mm x H233mm
Approx. Weight	35.8 kg (78.9 lbs)
Terminal Type	Female Copper Insert M8 (torque:10~12N.m)
Internal Resistance	Approx. 0.004 Ohm (fully charged @ 20°C)
Max. Charge Current	30A
Max. Discharge Current (5S)	960 A
Short Circuit Current	3000 A
Self Discharge	Approx. 3% per month @ 20°C
Ambient Temperature	Discharge: -20~60°C Charge: -20~60°C Storage: -20~45°C
Float Charge Voltage (20~25°C)	13.6-13.8V (-3mV/ cell/ °C)
Equalize and cycle Use Charge Voltage (20~25°C)	14.4-14.8V (-5mV/ cell / °C)
Container Material	ABS (UL94-V0 optional)



#### Complied standards

- IEC 60896-21/22
- UL1989
- JIS C8704
- GB/T19638

### BATTERY DIMENSIONS

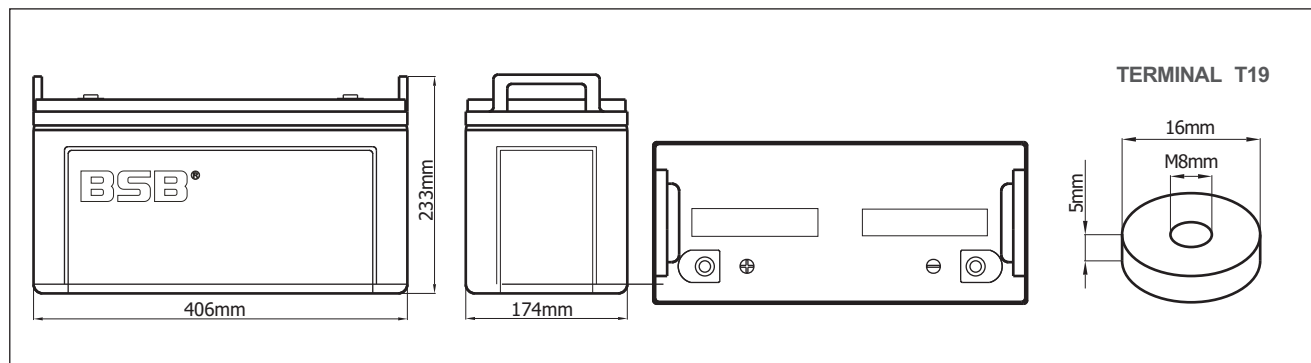


### BATTERY DISCHARGE TABLE

Constant Current Discharge Characteristics: Amps (25°C)											
F.V/Time	10 m in	15 m in	30 m in	1 h	2 h	3 h	4 h	5 h	8 h	10 h	20 h
1.60V	247	204	126	79.5	46.6	33.7	27.1	22.6	15.4	12.7	6.85
1.67V	228	192	120	77.4	45.8	33.3	26.8	22.3	15.2	12.6	6.70
1.70V	207	182	116	75.6	45.2	32.9	26.5	22.1	15.0	12.4	6.54
1.75V	192	169	112	74.1	44.4	32.4	26.2	21.8	14.8	12.2	6.42
1.80V	175	157	107	71.6	43.5	31.7	25.6	21.3	14.5	12.0	6.30
1.85V	158	143	101	68.5	41.8	30.7	24.8	20.8	14.2	11.7	6.15

Constant Power Discharge Characteristics: W/cell (25°C)											
F.V/Time	10 m in	15 m in	30 m in	1 h	2 h	3 h	4 h	5 h	8 h	10 h	20 h
1.60V	445	373	233	148	87.6	63.6	51.4	43.0	29.6	24.6	13.3
1.67V	414	354	223	145	86.6	63.2	51.0	42.8	29.4	24.4	13.1
1.70V	380	337	217	143	86.1	62.9	50.9	42.7	29.3	24.3	12.9
1.75V	357	316	211	141	85.3	62.4	50.7	42.5	29.1	24.1	12.7
1.80V	328	298	204	138	84.3	61.8	50.0	41.8	28.7	23.8	12.6
1.85V	299	274	194	133	81.7	60.3	49.0	41.1	28.2	23.4	12.4

## CHARACTERISTICS

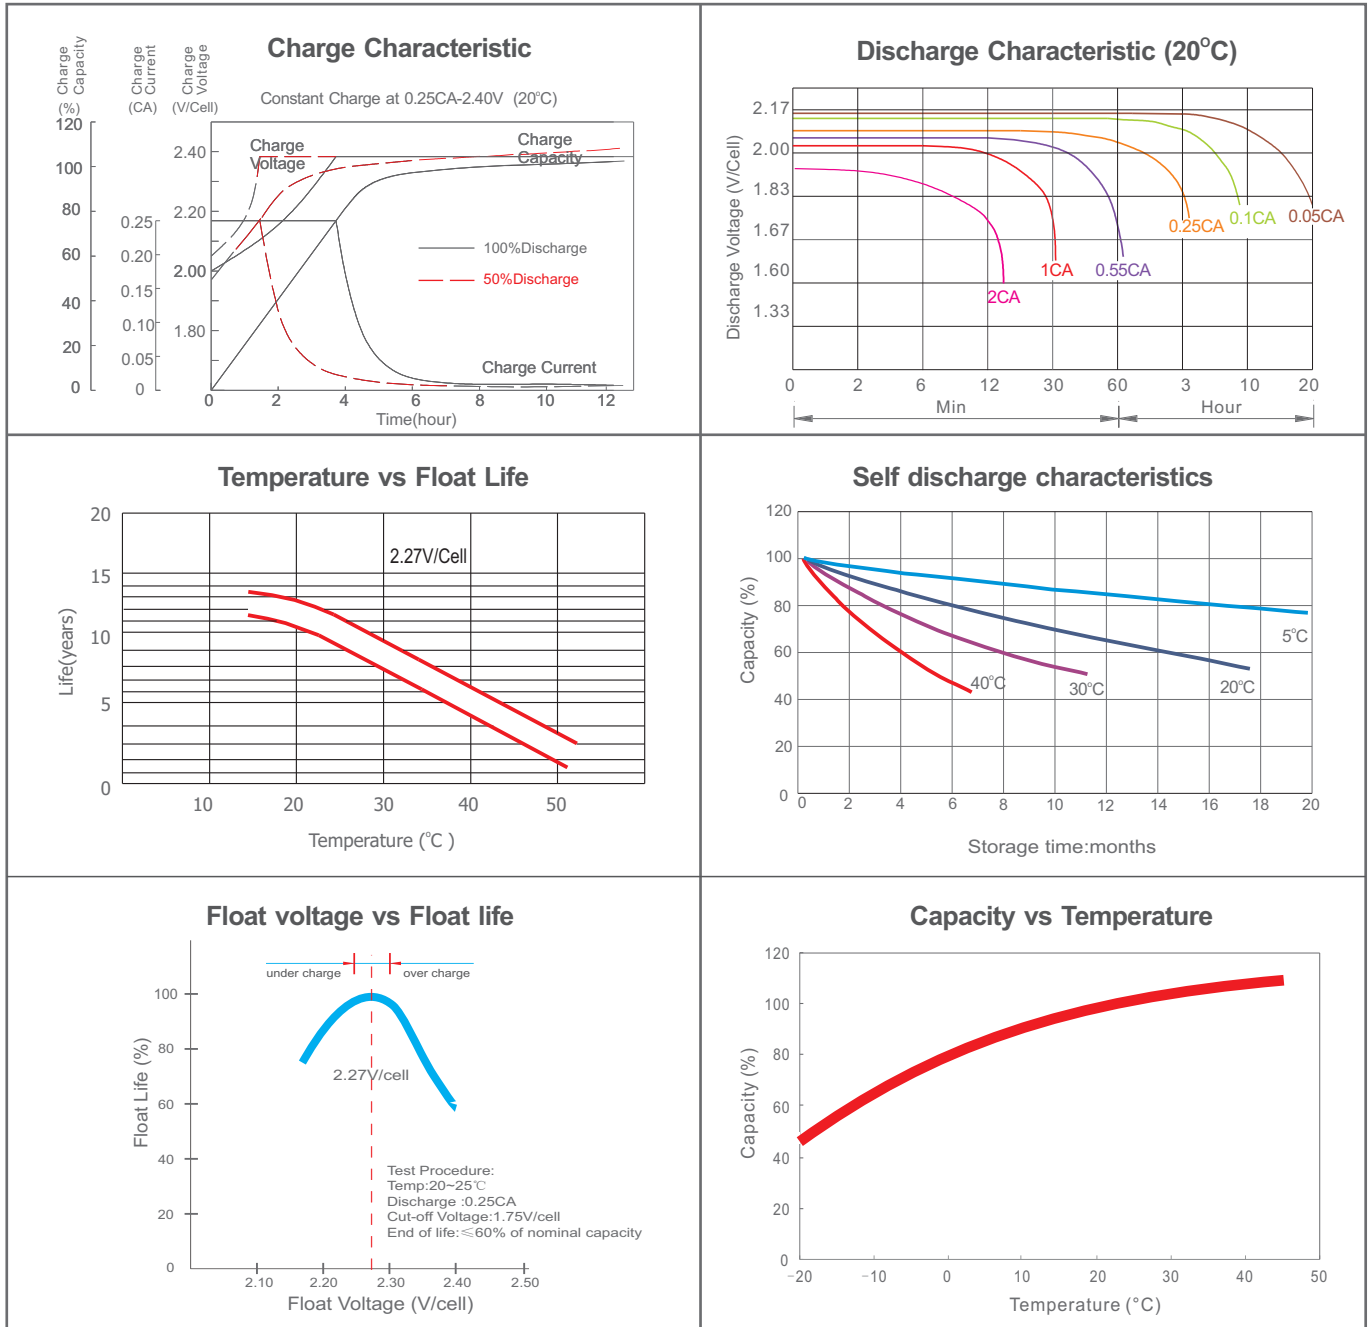

## FINAL VOLTAGE SETTINGS RECOMMENDED ACCORDING TO THE DISCHARGE CURRENT

Discharge Current I (A)	$I \leq 0.08C$	$0.08C \leq I < 0.2C$	$0.2C \leq I < 0.6C$	$0.6C \leq I < 1.0C$	$I \geq 1.0C$
Final of Voltage	$\geq 1.85V_{pc}$	$\geq 1.80V_{pc}$	$\geq 1.75V_{pc}$	$\geq 1.70V_{pc}$	$\geq 1.60V_{pc}$

## HEADQUARTERS AND SUBSIDIARIES

BSB Power Company Limited (HQ)  
 BSB Power Europe (France)  
 BSB Power Malaysia Sdn. Bhd  
 PT. BSB Indonesia  
 BSB Power (Thailand) Co., Ltd  
 BSB Power Company Pakistan Ltd

