

DURATION SERIES VRLA BATTERY

By combining up-to-date DCP-II formula in the positive plates and enhanced electrolyte for VRLA, BSB created an innovative range of DC batteries. This range features deep cycling use with higher cyclic life when compared with the standard Duration range. This series is highly suited to cyclic applications such as outdoor applications, small RE systems and electric vehicles.

12 V voltage **24Ah** capacity **AGM** tech **Enhanced deep cycling**



TECHNICAL SPECIFICATIONS

Nominal Voltage (V)	12 (6 cells per unit)
Designed Floating Life (20°C)	5 Years
Nominal Capacity (25°C)	24 Ah @ 20HR-rate (to 1.75Vpc)
Dimension (mm)	L175mm x W166mm x H125mm
Approx. Weight	8.1 kg (17.8 lbs)
Terminal Type	Terminal T5
Internal Resistance	Approx. 0.012 Ohm (fully charged @ 25°C)
Max. Charge Current	6 A
Max. Discharge Current (5S)	360 A
Short Circuit Current	1000 A
Self Discharge	Approx. 3% per month @ 20°C
Ambient Temperature	Discharge: -15~55°C Charge: -15~45°C Storage: -15~45°C
Float Charge Voltage (20~25°C)	13.6-13.8V (-3mV/ cell/ °C)
Equalize and cycle Use Charge Voltage (20~25°C)	14.4-14.8V (-5mV/ cell / °C)
Container Material	ABS (UL94-V0 optional)




ISO9001 ISO14001



Complied standards

- IEC 61056
- UL1989
- JIS C8707
- GB/T19639

BATTERY DIMENSIONS

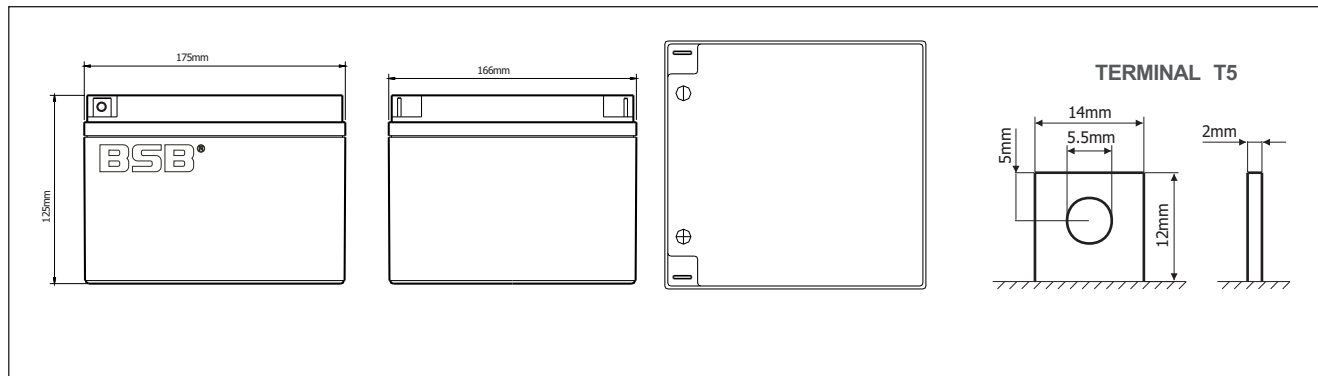


BATTERY DISCHARGE TABLE

Constant Current Discharge Characteristics: Amps (25°C)											
F.V/Time	10 m in	15 m in	30 m in	1 h	2 h	3 h	4 h	5 h	8 h	10 h	20 h
1.60V	51.5	39.3	23.4	14.7	9.27	6.61	5.23	4.32	2.91	2.38	1.27
1.67V	49.8	38.0	22.9	14.5	9.16	6.55	5.15	4.27	2.87	2.35	1.25
1.70V	47.6	37.0	22.5	14.3	9.06	6.49	5.09	4.21	2.84	2.32	1.23
1.75V	45.5	36.1	21.9	14.1	8.94	6.42	5.04	4.15	2.81	2.30	1.20
1.80V	43.0	35.2	21.6	13.8	8.81	6.33	4.97	4.10	2.78	2.27	1.17
1.85V	40.5	34.3	21.1	13.6	8.69	6.25	4.92	4.07	2.75	2.24	1.14

Constant Power Discharge Characteristics: W/cell (25°C)											
F.V/Time	10 m in	15 m in	30 m in	1 h	2 h	3 h	4 h	5 h	8 h	10 h	20 h
1.60V	103	79.7	48.1	28.9	17.6	12.7	9.91	8.21	5.59	4.60	2.47
1.67V	100	77.5	47.2	28.7	17.5	12.6	9.82	8.17	5.56	4.56	2.44
1.70V	97.1	76.3	46.7	28.4	17.4	12.5	9.78	8.13	5.54	4.54	2.42
1.75V	93.9	75.2	46.0	28.2	17.3	12.3	9.76	8.08	5.53	4.52	2.38
1.80V	89.7	74.0	45.6	27.8	17.2	12.2	9.72	8.06	5.50	4.51	2.34
1.85V	85.6	72.9	45.2	27.7	17.1	12.1	9.70	8.04	5.47	4.47	2.30

CHARACTERISTICS

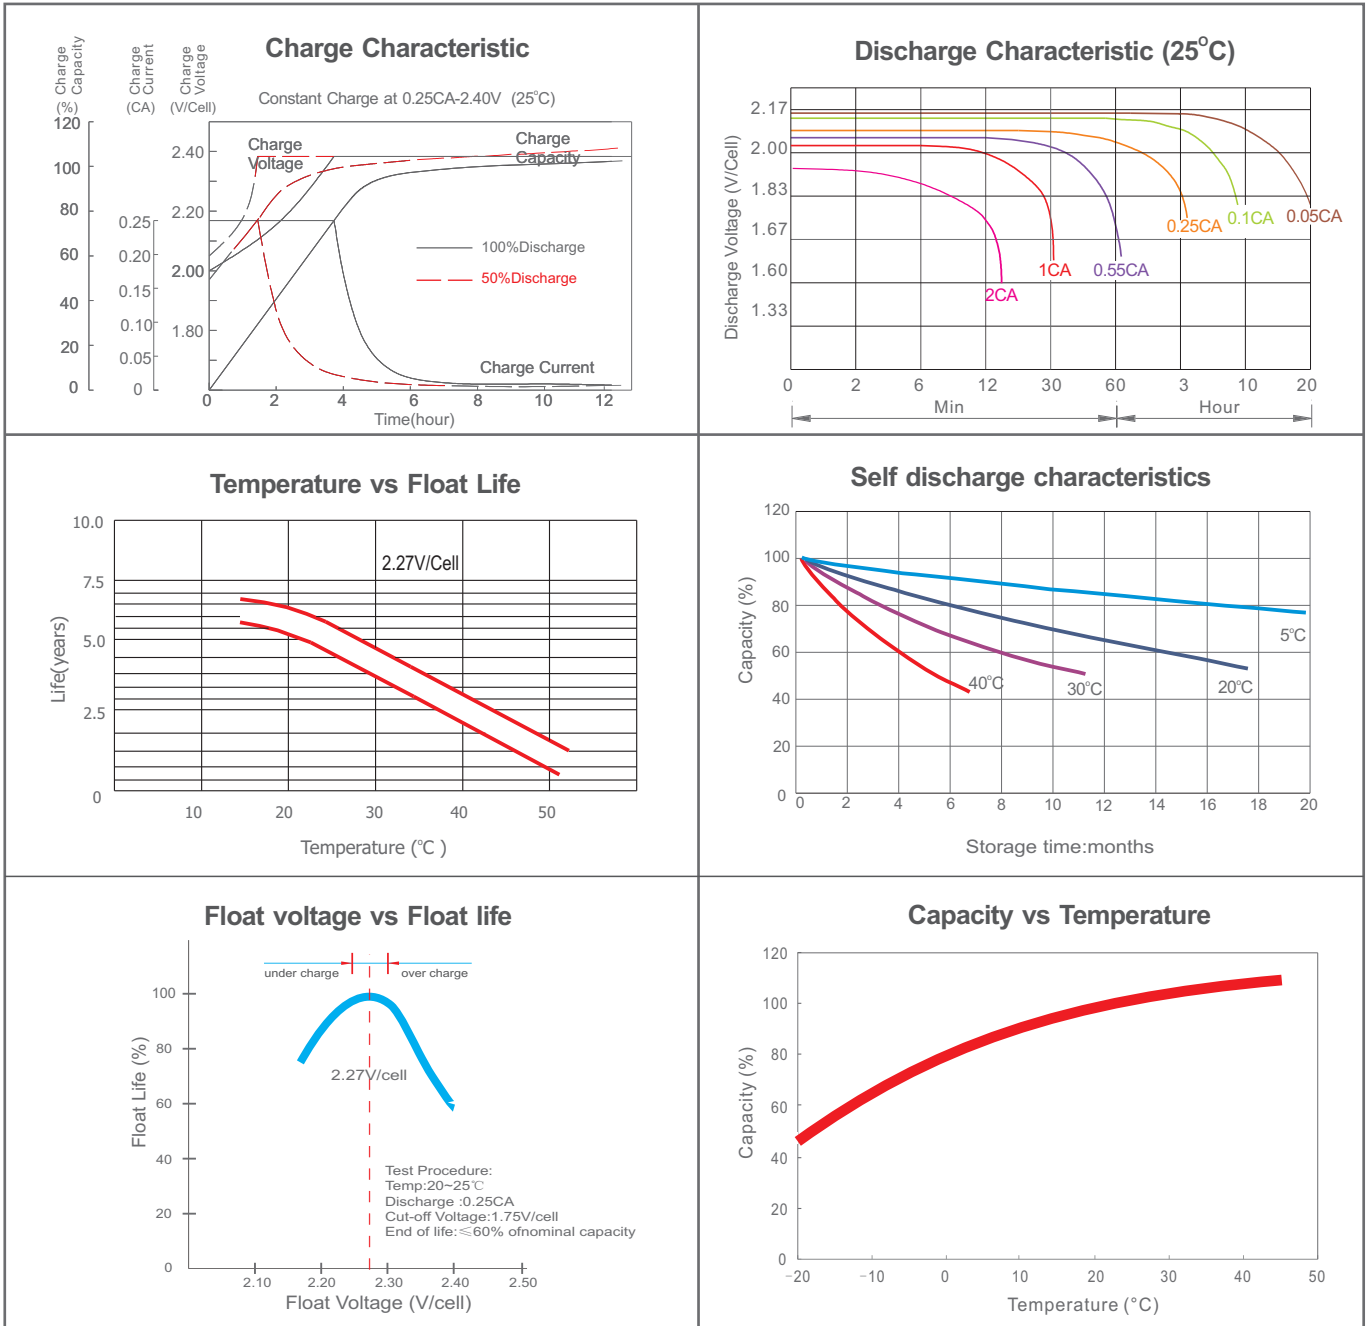

FINAL VOLTAGE SETTINGS RECOMMENDED ACCORDING TO THE DISCHARGE CURRENT

Discharge Current I (A)	$I \leq 0.08C$	$0.08C \leq I < 0.2C$	$0.2C \leq I < 0.6C$	$0.6C \leq I < 1.0C$	$I \geq 1.0C$
Final of Voltage	$\geq 1.85V_{pc}$	$\geq 1.80V_{pc}$	$\geq 1.75V_{pc}$	$\geq 1.7V_{pc}$	$\geq 1.6V_{pc}$

HEADQUARTERS AND SUBSIDIARIES

BSB Power Company Limited (HQ)
 BSB Power Europe (France)
 BSB Power Malaysia Sdn. Bhd
 PT. BSB Indonesia
 BSB Power (Thailand) Co., Ltd
 BSB Power Company Pakistan Ltd

