


YS12-14L-A2

Model NO .	YS12-14L-A2	
Same Dimensions As YUASA Model	YB14L-A2	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	14 AH	
Dimension	Length	135 mm (5.31 inches)
	Width	89 mm (3.50 inches)
	Height	160 mm (6.30 inches)
	Total Height	160 mm (6.30 inches)
Approx. Weight	Approx. 4.84kg (9.77Lbs)	
Charge Current (A)	1.4 A	



Dimensions

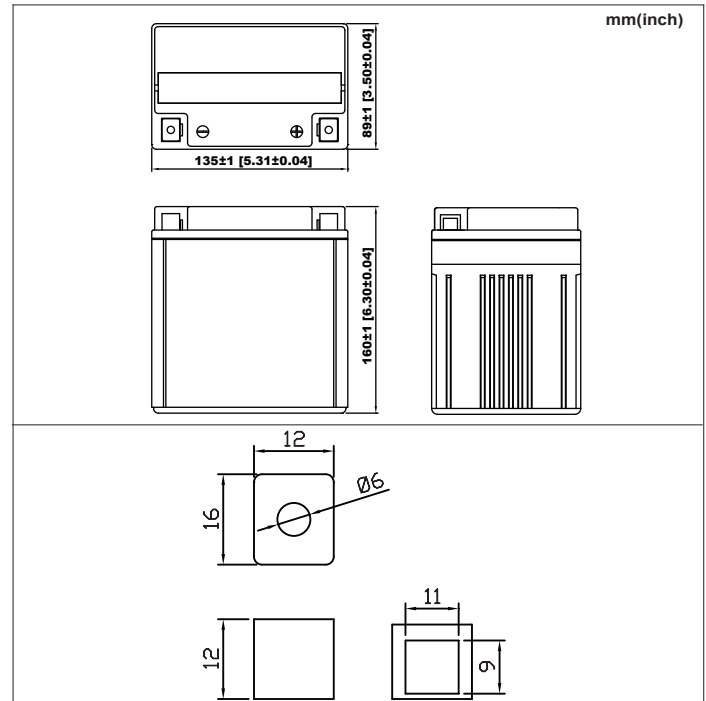

Characteristics

Capacity 25°C (77°F)	10hours rate (1.4 A to 10.5V)	14 Ah	
	5hours rate (2.8 A to 10.2V)	11.9 Ah	
	1C (14.0A to 9.6V)	6.3 Ah	
	3C (42.0A to 9.6V)	5.04 Ah	
Cold Cranking Amperes(-18°C SAE Standard)		160 A	
Cold Cranking Amperes(-18°C EN Standard)		240 A	
Internal Resistance (at 1KHz)		Approx. 7.5mΩ	
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)	
	Discharge	-15°C (5°F) to 50°C (122°F)	
	Storage	-15°C (5°F) to 40°C (104°F)	
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles		
	80% depth of discharge 225 cycles		
	50% depth of discharge 500 cycles		
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%	
	3 month	90%	
	6 month	80%	
Standby Use	3~5 years		
Case Material	PP		

