


### Specifications

Model NO.	YS12-6.5L	
Same Dimensions As YUASA Model		
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	6.5 AH	
Dimension	Length	139mm (5.47 inches)
	Width	66 mm (2.60 inches)
	Height	101 mm (3.98 inches)
	Total Height	101 mm (3.98 inches)
Approx. Weight	Approx. 2.26kg (5.05Lbs)	
Charge Current (A)	0.65 A	



### Dimensions

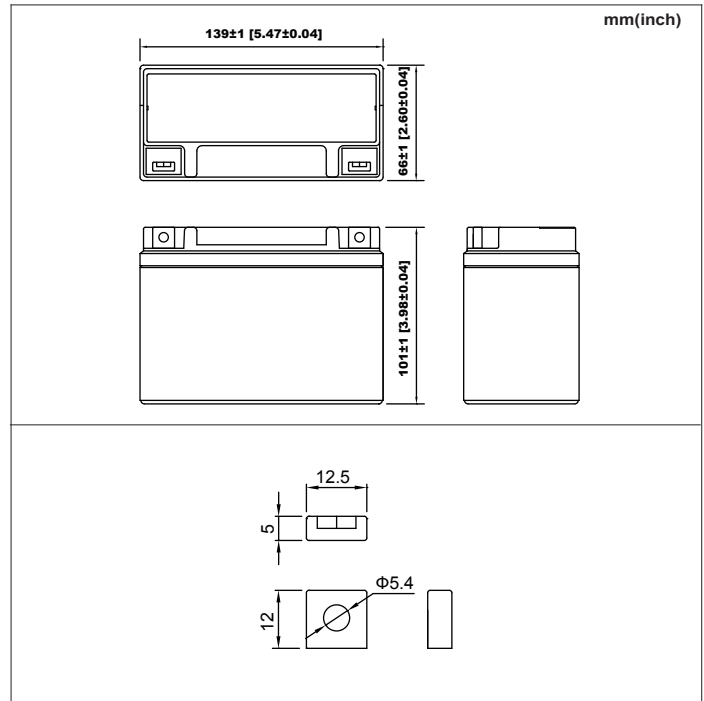

### Characteristics

Capacity 25°C (77°F)	10hours rate (0.65A to 10.5V)	6.5 Ah
	5hours rate (1.3A to 10.2V)	5.5 Ah
	1C (6.5A to 9.6V)	2.9 Ah
	3C (19.5A to 9.6V)	2.3Ah
Cold Cranking Amperes(-18°C SAE Standard)	70 A	
Cold Cranking Amperes(-18°C EN Standard)	105 A	
Internal Resistance (at 1KHz)	Approx.7.5mΩ	
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	ABS	

(V) FOR 12V BATTERY

Discharge Time VS. Discharge Current(25 °C)

