

Specifications


Model NO .	YT9B-BS	
Same Dimensions As YUASA Model	YT9B-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	7.5AH	
Dimension	Length	150 mm (5.9 inches)
	Width	70 mm (2.7 inches)
	Height	105mm (5.9nches)
	Total Height	105mm (5.9 inches)
Approx. Weight W/O . ACID	2.08kg (6.8Lbs)	
Approx. ACID Per Battery	0.42 L	
Charge Current (A)	0.75A	

Characteristics

Capacity 25°C(77°F)	10hours rate (0.75A to 10.5V)	7.5Ah
	5hours rate (1.5 A to 10.2V)	6.4Ah
	1C (7.5A to 9.6V)	3.4Ah
	3C (22.5A to 9.6V)	2.7Ah
Cold Cranking Amperes(-18°C SAE Standard)	80A	
Cold Cranking Amperes(-18°C EN Standard)	120 A	
Internal Resistance (at 1KHz)	Approx.7.0mΩ	
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	PP	



Dimensions

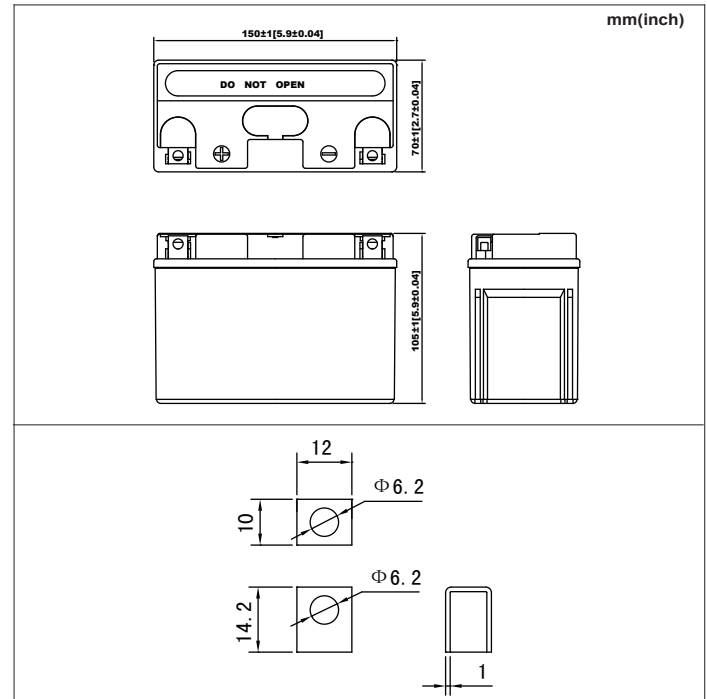

(V) FOR 12V BATTERY

Discharge Time VS. Discharge Current(25 °C)

