

YTX12A-BS

Tel.: 86-592-5558101 Fax: 86-592-5518019
 E-mail: sales@yucell.com
 Add.: 7/F, Haiyun Building, 16 Haishan Road, Xiamen, China

Specifications


Model NO.	YTX12A-BS	
Same Dimensions As YUASA Model	YTX12A-BS	
Nominal Voltage	12V	
Rated Capacity(10 hours rate)	9.5 AH	
Dimension	Length	150 mm (5.91 inches)
	Width	87 mm (3.43 inches)
	Height	106 mm (4.17 inches)
	Total Height	106 mm (4.17 inches)
Approx. Weight W/O . ACID	2.53 kg (5.89 Lbs)	
Approx. ACID Per Battery	0.49 L	
Charge Current (A)	0.95 A	

Characteristics

Capacity 25°C (77°F)	10hours rate (0.95 A to 10.5V)	9.5 Ah
	5hours rate (1.9 A to 10.2V)	8.07 Ah
	1C (9.5 A to 9.6V)	4.27 Ah
	3C (28.5 A to 9.6V)	3.42 Ah
Cold Cranking Amperes(-18°C SAE Standard)		120 A
Cold Cranking Amperes(-18°C EN Standard)		180 A
Internal Resistance (at 1KHz)		Approx. 7.0m Ω
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	PP	



Dimensions

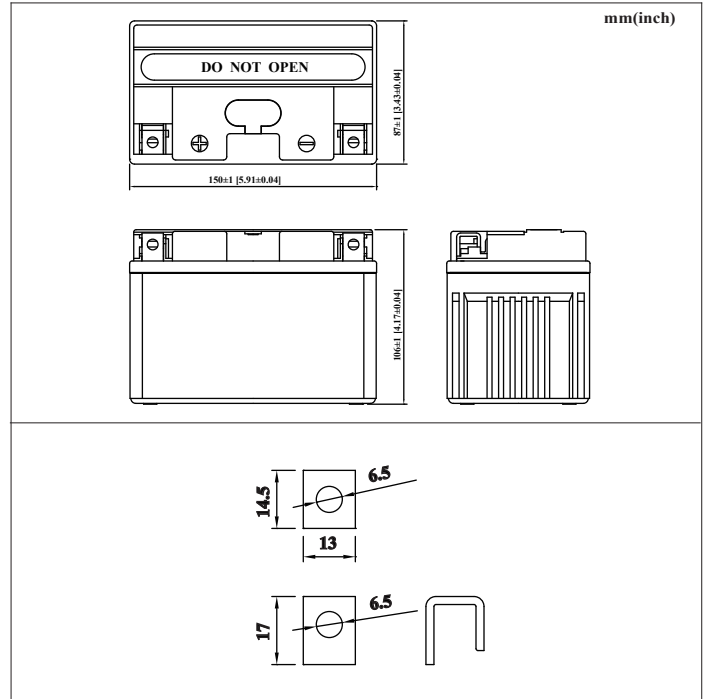

(V)
FOR 12V
BATTERY

Discharge Time VS. Discharge Current(25°C)

