


Specifications

Model NO .	DTX14AH-BS	
Same Dimensions As YUASA Model	YTX14AH-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	13Ah	
Dimension	Length	134mm (5.28 inches)
	Width	89 mm (3.50 inches)
	Height	166mm (6.54 inches)
	Total Height	166mm (6.54 inches)
Approx. Weight W/O . ACID	3.59kg (7.91Lbs)	
Approx. ACID Per Battery	0.64 L	
Charge Current (A)	1.3A	



Dimensions

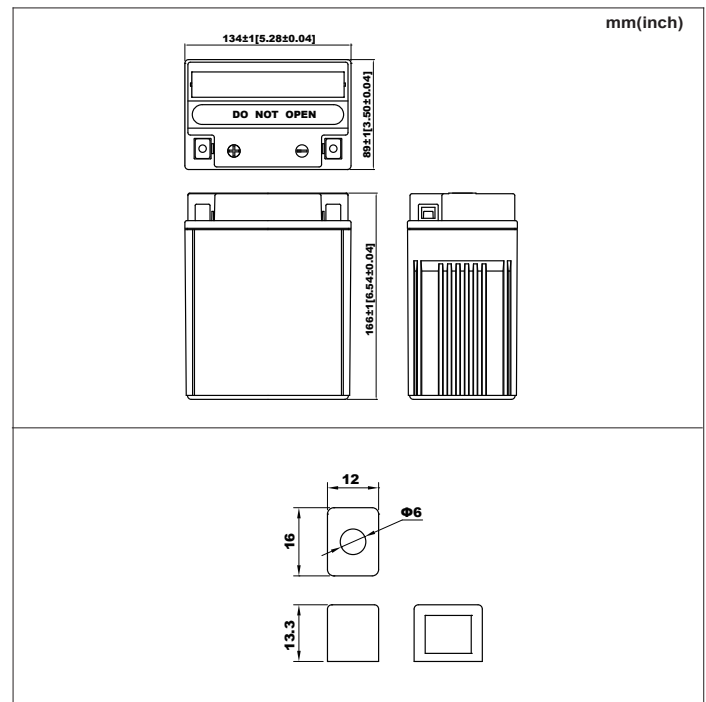

Characteristics

Capacity 25°C (77°F)	10hours rate (1.3A to 10.5V)	13.0Ah
	5hours rate (2.6A to 10.2V)	11.1Ah
	1C (13.0A to 9.6V)	5.9 Ah
	3C (39.0A to 9.6V)	4.7 Ah
Cold Cranking Amperes(-18°C SAE Standard)	160 A	
Cold Cranking Amperes(-18°C EN Standard)	240 A	
Internal Resistance (at 1KHz)	Approx. 7.0m Ω	
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	PP	

(V) FOR 12V BATTERY

Discharge Time VS. Discharge Current(25 °C)

