

GENERAL FEATURES

- Ø Environmentally friendly
- Ø Can be used at vertical or horizontal orientation
- Ø High Reliability and Good Quality
- Ø High gas recombination efficiency
- Ø High Power Density
- Ø Maintenance-Free Operation


APPLICATIONS

- Ø UPS & EPS
- Ø Emergency lighting Systems
- Ø Medical Equipment
- Ø Cable TV Systems
- Ø Alarm Systems
- Ø Electric Test Equipment
- Ø Security Systems



DIMENSIONS&WEIGHT

Length(mm)	151±1
Width(mm)	65±1
Height(mm)	94±1
Total Height(mm)	100±1
Weight(kg)	2.65±3%

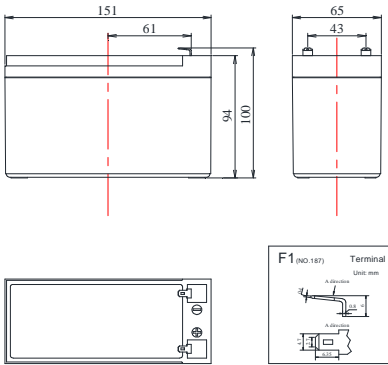

COMPLIED STANDARDS

IEC 60896-21/22 JIS C8704
 YD/T799 BS6290 part4
 GB/T19639UL 1989

TECHNICAL SPECIFICATIONS



Nominal Voltage		12V(6 cells per unit)
Design Floating Life @25°C		5 Years
Nominal Capacity @25°C(20 hour rate@0.45A,10.50V)		9.0Ah
Capacity @25°C	10 hour rate (0.86A,10.8V)	8.60Ah
	5 hour rate (1.60A,10.5V)	8.00Ah
	1 hour rate (5.99A,9.6V)	5.99Ah
Internal Resistance	Full Charged Battery@25°C	≤18.0mΩ
Ambient Temperature	Discharge	-20°C~50°C
	Charge	-20°C~50°C
	Storage	-20°C~50°C
Max.Discharge Current@25°C		135A(5s)
Capacity affected by Temperature (10 hr Capacity)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Floating Charge	Initial Charging Current Less than1.8A Voltage 13.5-13.8V
	Cycle Charge	Initial Charging Current Less than1.8A Voltage 14.4-15.0V

BATTERYDISCHARGETABLE

Discharge Constant Current per Cell (Amperes at25°C)







F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	30.7	19.8	14.9	9.90	6.93	5.99	3.71	2.54	1.70	1.14	0.94	0.50
1.65V	30.1	19.4	14.6	9.72	6.80	5.88	3.65	2.50	1.67	1.12	0.93	0.49
1.70V	29.6	19.1	14.36	9.54	6.68	5.77	3.58	2.45	1.63	1.10	0.91	0.48
1.75V	29.0	18.7	14.09	9.36	6.55	5.66	3.51	2.41	1.60	1.08	0.89	0.47
1.80V	27.9	18.0	13.54	9.00	6.30	5.45	3.38	2.31	1.54	1.04	0.86	0.45

Discharge Constant Power per Cell (Watts at25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	59.1	38.1	28.7	19.1	13.34	11.53	7.15	4.90	3.27	2.19	1.81	0.95
1.65V	58.0	37.4	28.2	18.7	13.10	11.32	7.02	4.81	3.21	2.15	1.78	0.94
1.70V	56.9	36.7	27.6	18.4	12.86	11.11	6.89	4.72	3.15	2.12	1.75	0.92
1.75V	55.9	36.0	27.1	18.0	12.61	10.90	6.76	4.63	3.09	2.08	1.72	0.90
1.80V	53.7	34.7	26.1	17.3	12.13	10.48	6.50	4.45	2.97	2.00	1.65	0.87

NoteThe above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values.Cell and battery designs/specifications are subject to modification without notice. Contact MCA for the latest information.

PERFORMANCE CHARACTERISTICS

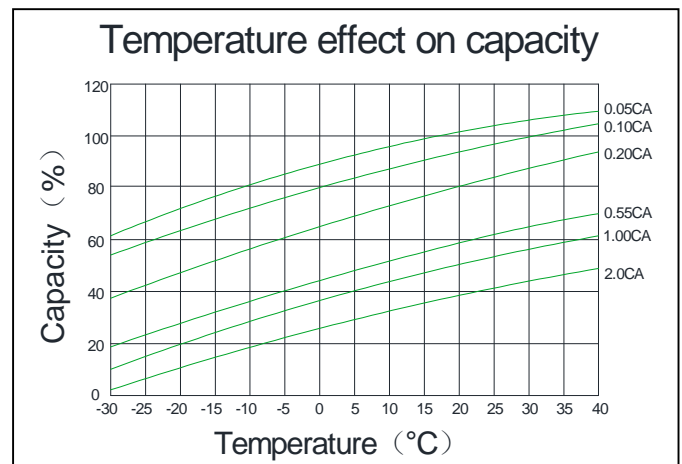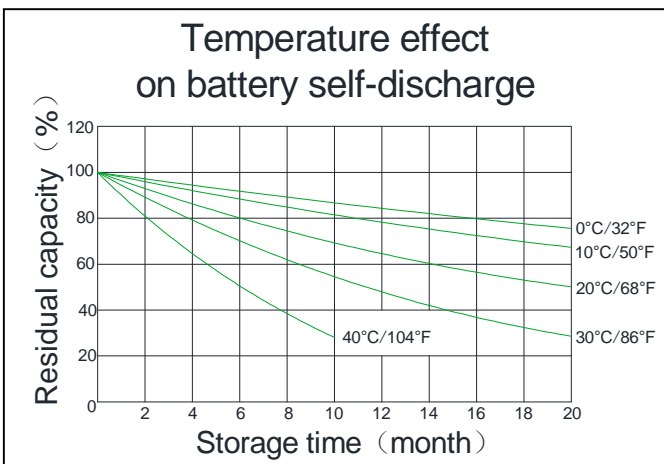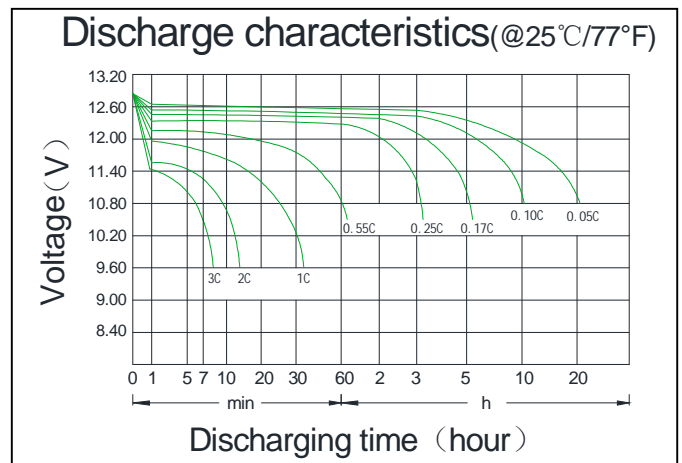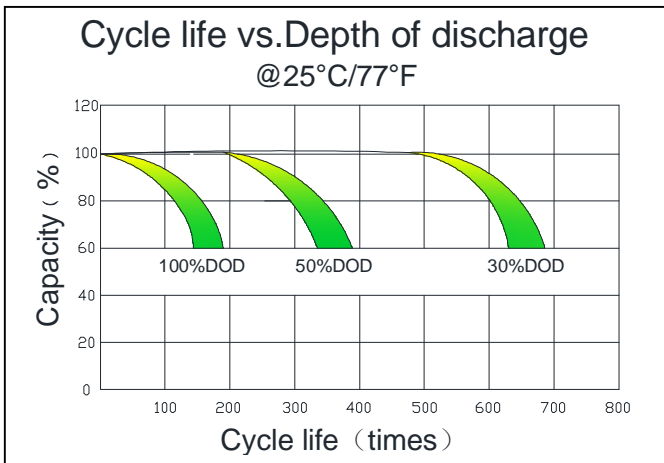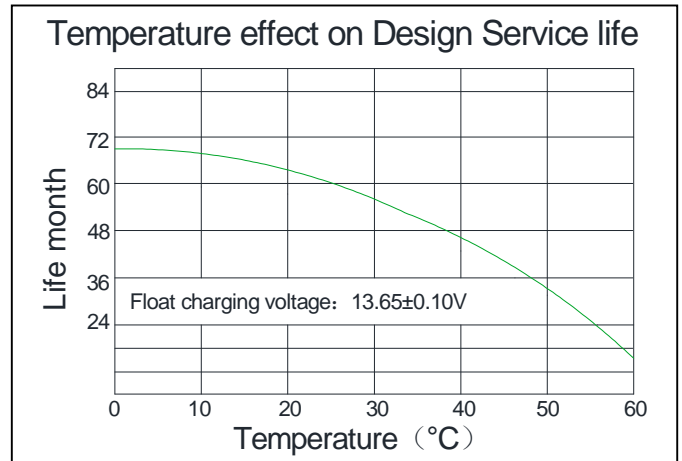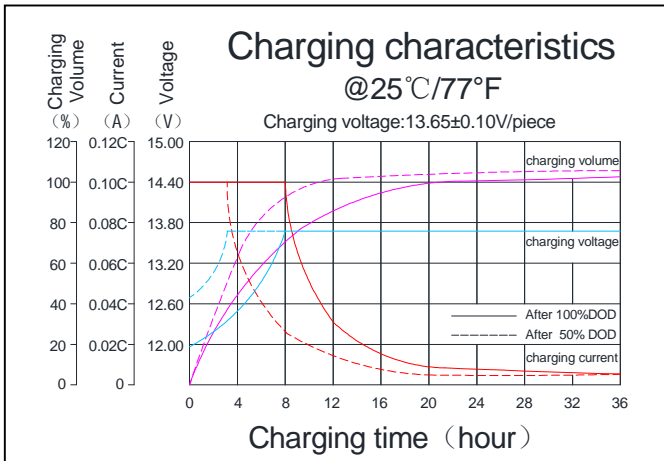

BATTERY CONSTRUCTION

Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	ABS (UL94-V0 optional)	Flame Si-Rubber aging resister	Female Copper Insert (F1/F2)	Advanced AGM separator for high pressure cell design	Dilute high purity sulphuric acid	Two layers epoxy resin seal

MCA Battery Manufacture Co., Ltd.

Cangjiang Industrial Estate Gaoming District Foshan City China

Tel: +86-757-66752600 Fax: +86-757-66752601 HTTP: //WWW.MCABATTERY.COM