

Specifications


Model NO .	YTX14-BS	
Same Dimensions As YUASA Model	YTX14-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	12 AH	
Dimension	Length	151 mm (5.94 inches)
	Width	87 mm (3.43 inches)
	Height	146 mm (5.75 inches)
	Total Height	146 mm (5.75 inches)
Approx. Weight W/O . ACID	3.47 kg (7.60 Lbs)	
Approx. ACID Per Battery	0.66 L	
Charge Current (A)	1.2 A	

Characteristics

Capacity 25°C(77°F)	10hours rate (1.2 A to 10.5V)	12 Ah	
	5hours rate (2.4 A to 10.2V)	10.2 Ah	
	1C (12 A to 9.6V)	5.4Ah	
	3C (36 A to 9.6V)	4.3 Ah	
Cold Cranking Amperes(-18°C SAE Standard)	180 A		
Cold Cranking Amperes(-18°C EN Standard)	270 A		
Internal Resistance (at 1KHz)	Approx.7.0m Ω		
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)	
	Discharge	-15°C (5°F) to 50°C (122°F)	
	Storage	-15°C (5°F) to 40°C (104°F)	
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles		
	80% depth of discharge 225 cycles		
	50% depth of discharge 500 cycles		
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%	
	3 month	90%	
	6 month	80%	
Standby Use	3~5 years		
Case Material	PP		



Dimensions

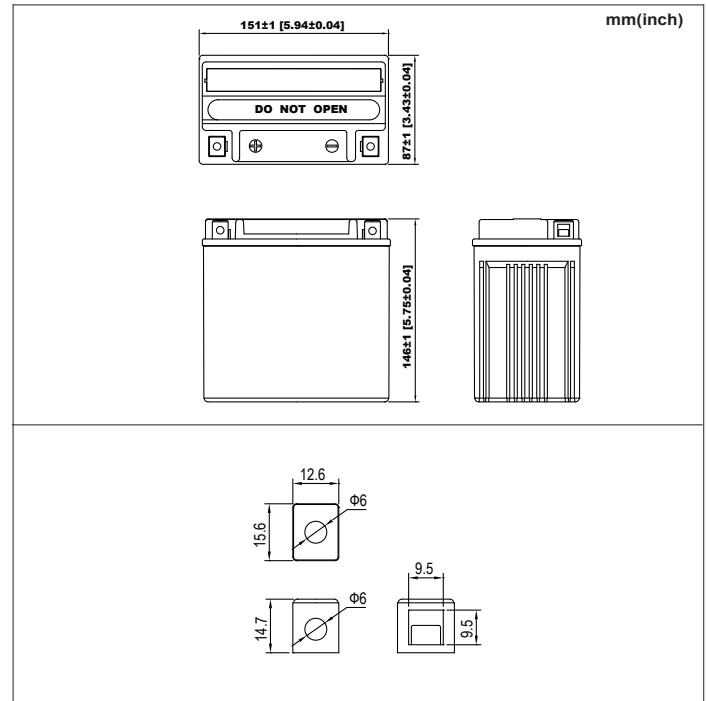

(V) FOR 12V BATTERY

Discharge Time VS. Discharge Current(25 °C)

