



POWERROAD YTX14AHL-BS

YUCELL
INDUSTRY LIMITED

www.yucell.com

Tel.: 86-592-5558101 Fax: 86-592-5518019

E-mail: sales@yucell.com

Add.: 7/F, Haiyun Building, 16 Haishan Road, Xiamen, China

Specifications


Model NO .	YTX14AHL-BS	
Same Dimensions As YUASA Model	YTX14AHL-BS	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	13AH	
Dimension	Length	134mm (5.27inches)
	Width	89mm (3.50 inches)
	Height	166mm (6.53inches)
	Total Height	166mm (6.53inches)
Approx. Weight W/O . ACID	3.59kg (7.9Lbs)	
Approx. ACID Per Battery	0.63 L	
Charge Current (A)	1.3A	

Characteristics

Capacity 25°C(77°F)	10hours rate (1.3A to 10.5V)	13Ah	
	5hours rate (2.6A to 10.2V)	11.0Ah	
	1C (13A to 9.6V)	5.8Ah	
	3C (39A to 9.6V)	4.6Ah	
Cold Cranking Amperes(-18°C SAE Standard)		160A	
Cold Cranking Amperes(-18°C EN Standard)		240 A	
Internal Resistance (at 1KHz)		Appox.7.0mΩ	
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)	
	Discharge	-15°C (5°F) to 50°C (122°F)	
	Storage	-15°C (5°F) to 40°C (104°F)	
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles		
	80% depth of discharge 225 cycles		
	50% depth of discharge 500 cycles		
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%	
	3 month	90%	
	6 month	80%	
Standby Use	3~5 years		
Case Material	PP		



Dimensions

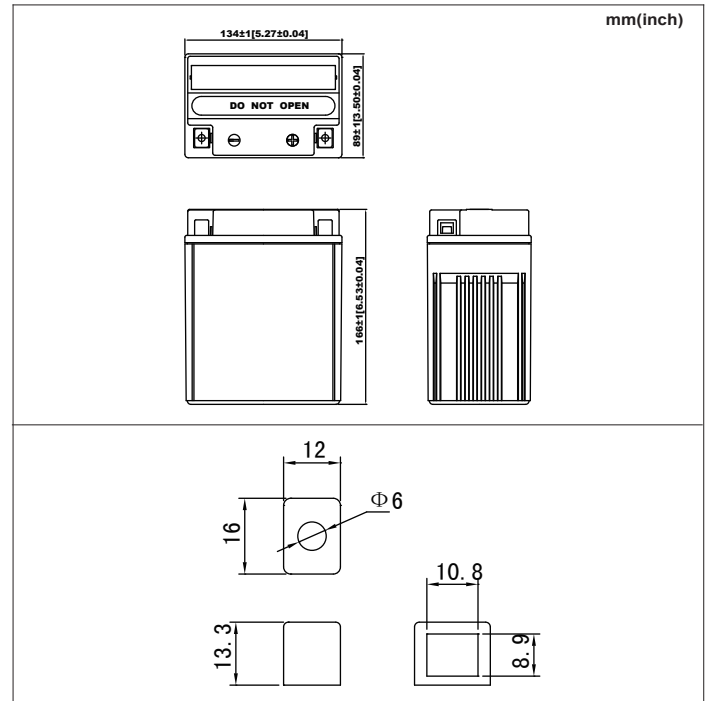

(V) FOR 12V BATTERY

Discharge Time VS. Discharge Current(25 °C)

