



POWERROAD

YS12-9L-B

YUCELL
 + INDUSTRY LIMITED -

www.yucell.com

Tel.: 86-592-5558101 Fax: 86-592-5518019


E-mail: sales@yucell.com

Add.: 7F,Haiyun Building, No.16,Haishan Road,Xiamen,361013,China

Model NO .	YS12-9L-B	
Same Dimensions As YUASA Model	YB9L-B	
Nominal Voltage	12V	
Rated Capacity (10 hours rate)	9 AH	
Dimension	Length	136 mm (4.72 inches)
	Width	76 mm (2.99 inches)
	Height	139 mm (5.47 inches)
	Total Height	139 mm (5.47 inches)
Approx. Weight	Approx.2.95 kg (6.5 Lbs)	
Charge Current (A)	0.9 A	



Dimensions

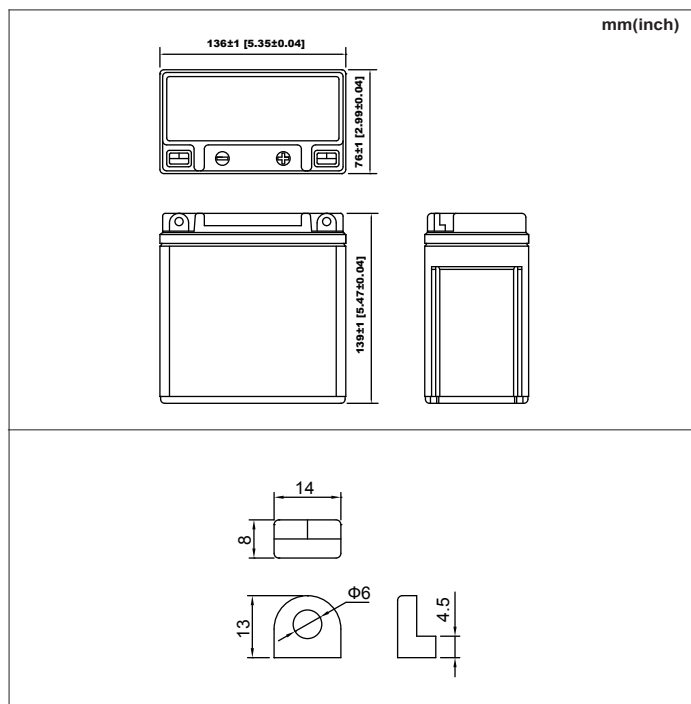

Characteristics

Capacity 25°C (77°F)	10hours rate (0.9 A to 10.5V)	9.0 Ah
	5hours rate (1.8 A to 10.2V)	7.6 Ah
	1C (9.0A to 9.6V)	4.0 Ah
	3C (27A to 9.6V)	3.2 Ah
Cold Cranking Amperes(-18°C SAE Standard)		95 A
Cold Cranking Amperes(-18°C EN Standard)		142 A
Internal Resistance (at 1KHz)		Approx.7.5m Ω
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)
	Discharge	-15°C (5°F) to 50°C (122°F)
	Storage	-15°C (5°F) to 40°C (104°F)
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles	
	80% depth of discharge 225 cycles	
	50% depth of discharge 500 cycles	
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%
	3 month	90%
	6 month	80%
Standby Use	3~5 years	
Case Material	ABS	

(V) FOR 12V BATTERY

Discharge Time VS. Discharge Current(25 °C)

