



Specifications

Nominal Voltage		12 V
Capacity (25°C)	20HR(10.5V)	18Ah
	10HR(10.5V)	16.7Ah
	1HR(9.60V)	11.7Ah
Dimension	Length	181 ± 2mm (7.13inch)
	Width	77 ± 1mm (3.03inch)
	Height	167 ± 2mm (6.57inch)
	Total Height	167 ± 2mm (6.57inch)
Approx. Weight		5.45kg (12.0lbs) ± 4%
Terminal type		T3/T8
Internal resistance (Fully charged, 25°C)		Approx. 16mΩ
Capacity affected by temperature (20HR)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-discharge (25°C)	3 month	Remaining Capacity: 91%
	6 month	Remaining Capacity: 82%
	12 month	Remaining Capacity: 65%
Nominal operating temperature		25°C ± 3°C (77°F ± 5°F)
Operating temperature range	Discharge	-15°C ~ 50°C (5°F ~ 122°F)
	Charge	-10°C ~ 50°C (14°F ~ 122°F)
	Storage	-20°C ~ 50°C (-4°F ~ 122°F)
Float charging voltage(25°C)		13.60 to 13.80V Temperature compensation: -18mV/°C
Cyclic charging voltage(25°C)		14.50 to 14.90V Temperature compensation: -30mV/°C
Maximum charging current		5.4A
Terminal material		Copper
Maximum discharge current		270A(5 sec.)
Designed floating life(20°C)		15 years

Dimensions

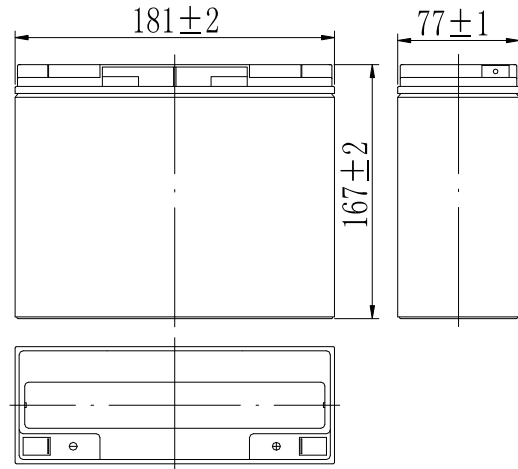

Terminal

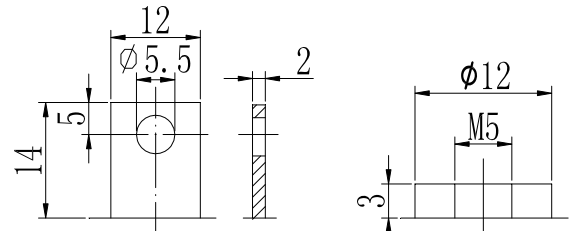

Terminal T3

Terminal T8

- ◆ Absorbent glass mat technology;
- ◆ Recognized by UL & CE;
- ◆ ABS container.

Constant Current Discharge Characteristics (A, 25°C)


F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
1.60V	41.9	33.5	18.7	11.7	6.39	4.59	3.67	3.12	2.02	1.70	0.91
1.65V	40.6	32.7	18.3	11.5	6.36	4.56	3.65	3.10	2.01	1.69	0.91
1.70V	39.0	31.5	17.8	11.2	6.30	4.53	3.63	3.08	1.99	1.68	0.91
1.75V	37.3	30.4	17.3	11.0	6.21	4.50	3.60	3.06	1.98	1.67	0.90
1.80V	35.2	28.8	16.7	10.7	6.05	4.37	3.49	2.97	1.92	1.64	0.88

Constant Power Discharge Characteristics (Watt per cell 25°C)


F.V/TIME	10min	15min	30min	60min	2h	3h	4h	5h	8h	10h	20h
1.60V	78.8	63.7	35.7	22.5	12.5	9.08	7.28	6.22	4.03	3.40	1.83
1.65V	76.3	62.2	35.0	22.2	12.4	9.03	7.25	6.17	4.02	3.38	1.82
1.70V	73.3	59.8	34.0	21.7	12.3	8.97	7.20	6.13	3.98	3.37	1.82
1.75V	70.2	57.8	33.2	21.2	12.1	8.92	7.15	6.08	3.97	3.35	1.80
1.80V	66.2	54.8	31.8	20.7	11.8	8.65	6.93	5.90	3.83	3.28	1.77

Note: The above characteristics data can be obtained within three charge/discharge cycles.


Discharge Characteristics(25°C)

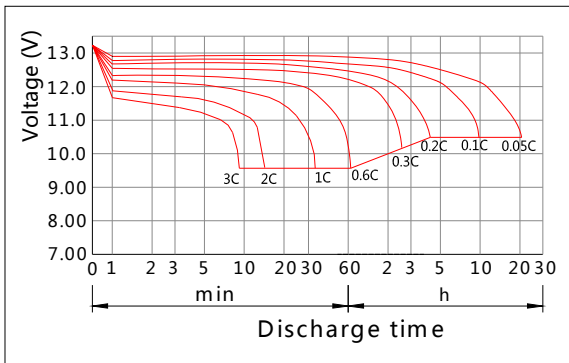


Charging Characteristics(25°C)

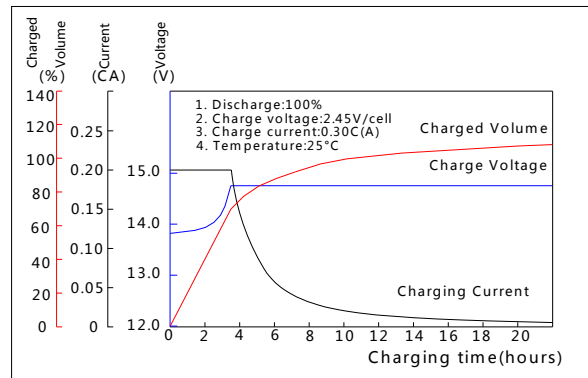


Effect of Temperature on Capacity

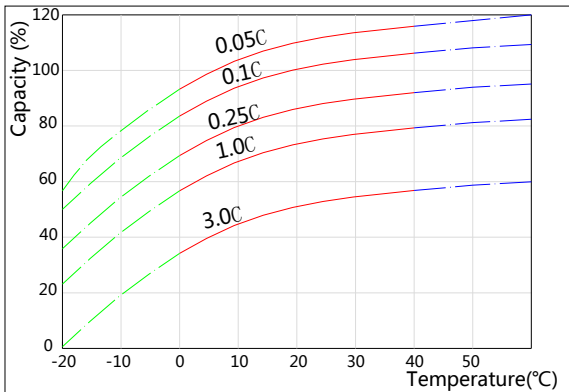


Self-discharge Characteristics

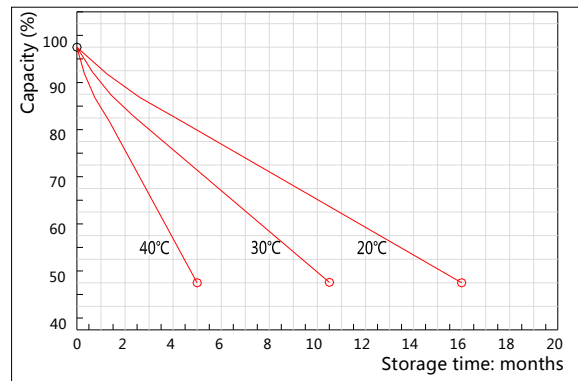


The Relationship for Open Circuit Voltage and Residual Capacity (25°C)

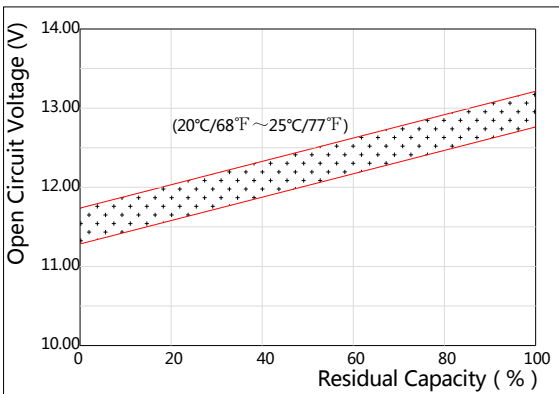

The Relationship for Charging Voltage and Temperature

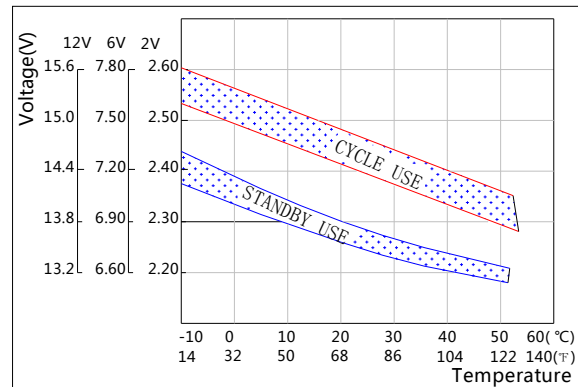

Floating Life on Temperature

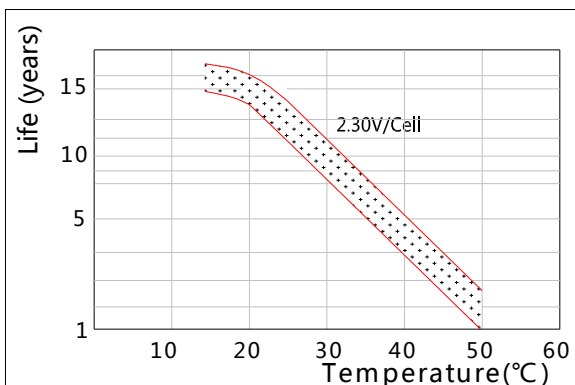

Cycle Life on D.O.D(25°C)

