

GENERAL FEATURES

- Environmentally friendly
- Can be used at vertical or horizontal orientation
- High Reliability and Good Quality
- High gas recombination efficiency
- High Power Density
- Maintenance-Free Operation


APPLICATIONS

- UPS & EPS
- Emergency lighting Systems
- Medical Equipment
- Cable TV Systems
- Alarm Systems
- Electric Test Equipment
- Security Systems



DIMENSIONS & WEIGHT

Length(mm)	484±1
Width(mm)	171±1
Height(mm)	241±1
Total Height(mm)	241±1
Weight(kg)	43.5±3%

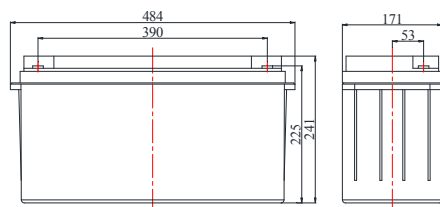

COMPLIED STANDARDS

IEC 60896-21/22	JIS C8704
YD/T799	BS6290 part4
GB/T 19638	UL 1989

TECHNICAL SPECIFICATIONS



Nominal Voltage		12V(6 cells per unit)
Design Floating Life @25°C		10 Years
Nominal Capacity @25°C (10 hour rate@15.00A,10.80V)		150Ah
Capacity @25°C	20 hour rate (8.03A,10.5V)	160.6Ah
	5 hour rate (26.4A,10.5V)	132.0Ah
	1 hour rate (95.7A,9.6V)	95.7Ah
Internal Resistance	Full Charged Battery@25°C	≤4.5mΩ
Ambient Temperature	Discharge	-20°C~50°C
	Charge	-20°C~50°C
	Storage	-20°C~50°C
Max.Discharge Current@25°C		1500A(5s)
Short Circuit Current (A)		3400
Capacity affected by Temperature (10 hr Capacity)	40°C	102%
	25°C	100%
	0°C	85%
	-15°C	65%
Self-Discharge@25°C per Month		3%
Charge (Constant Voltage) @25°C	Standby Use	Initial Charging Current Less than 30A Voltage 13.6-13.8V
	Cycle Use	Initial Charging Current Less than 30A Voltage 14.4-14.9V

BATTERY DISCHARGE TABLE

Discharge Constant Current per Cell (Amperes at 25°C)







F.V/Time	15min	30min	45min	1h	2h	3h	5h	6h	8h	10h	20h
1.60V	270.8	159.5	120.8	95.7	56.3	41.4	27.9	24.3	19.1	15.8	8.33
1.67V	255.8	151.1	116.1	92.9	54.5	40.1	27.5	23.9	18.9	15.5	8.25
1.70V	240.2	146.7	111.9	89.3	53.0	39.0	26.9	23.4	18.6	15.3	8.13
1.75V	225.0	140.3	107.0	85.7	51.6	38.1	26.4	23.0	18.3	15.2	8.03
1.80V	211.1	135.2	103.1	82.7	49.7	36.9	25.8	22.5	18.0	15.0	7.95

Discharge Constant Power per Cell (Watts at 25°C)

F.V/Time	15min	30min	45min	1h	2h	3h	5h	6h	8h	10h	20h
1.60V	517.7	316.7	229.4	183.6	106.7	79.1	53.9	47.0	37.2	30.8	16.4
1.67V	495.3	296.9	221.6	178.7	103.8	77.0	53.0	46.2	36.9	30.5	16.3
1.70V	461.6	290.4	214.5	172.5	101.4	75.2	52.2	45.6	36.5	30.2	16.1
1.75V	433.1	276.5	206.0	166.2	99.0	73.7	51.5	44.9	36.0	29.9	16.0
1.80V	406.5	265.2	199.1	160.8	95.7	71.6	50.4	44.1	35.6	29.7	15.8

Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact **MCA** for the latest information.

PERFORMANCE CHARACTERISTICS

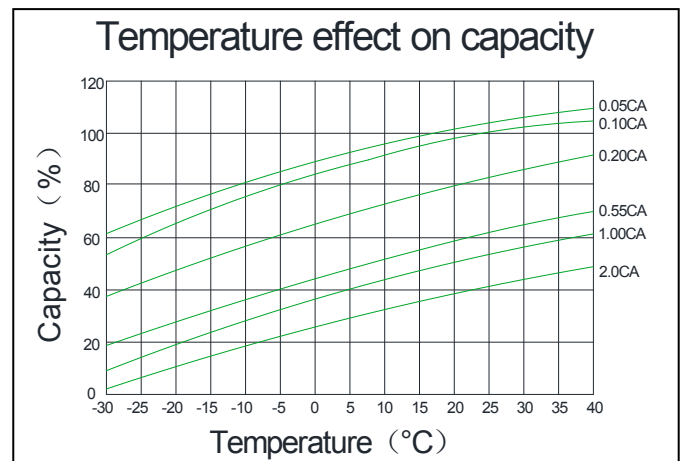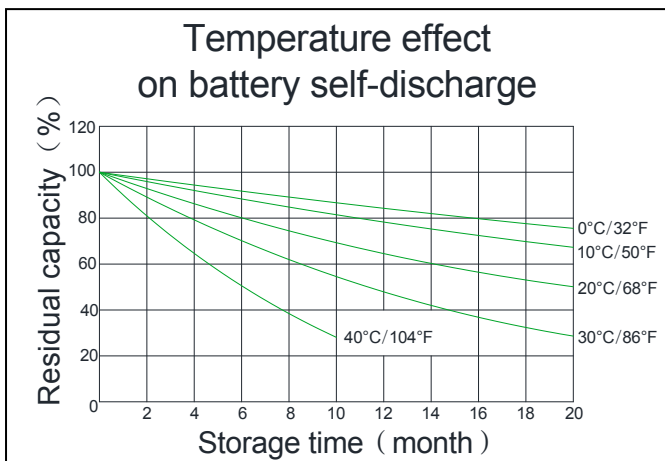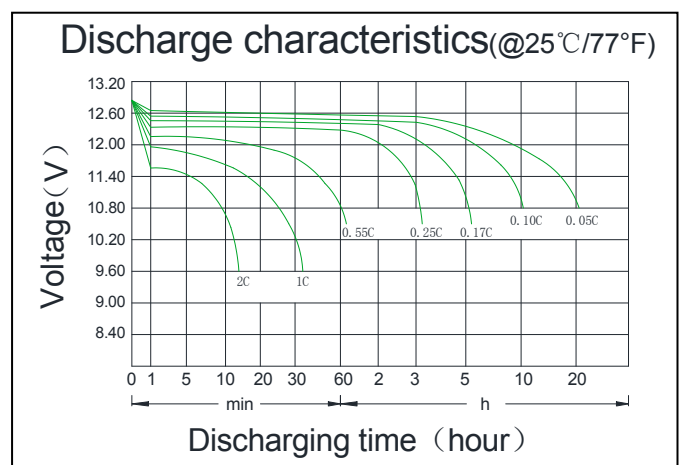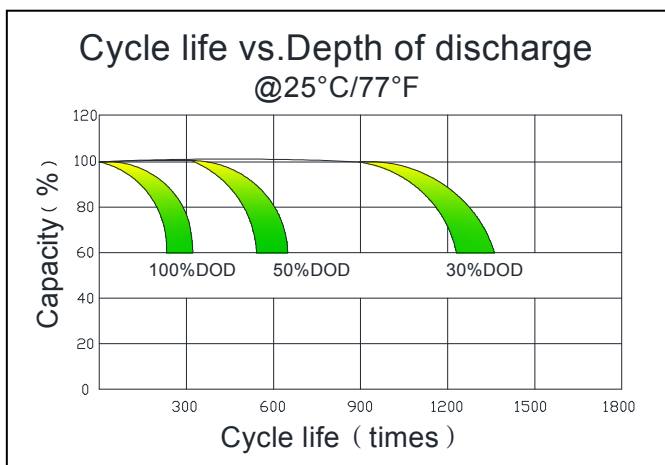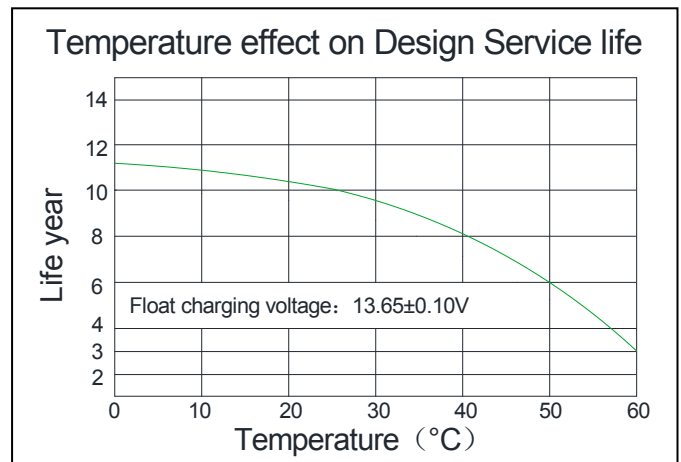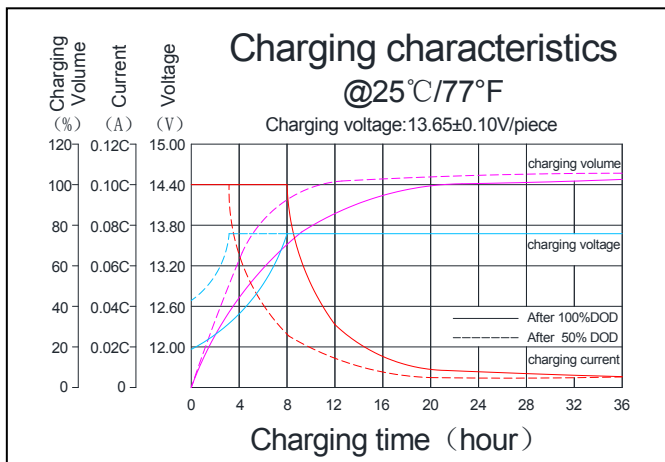

BATTERY CONSTRUCTION



Component	Positive plate	Negative plate	Container & Cover	Safety valve	Terminal	Separator	Electrolyte	Pillar seal
Features	Thick high Sn low Ca grid with special paste	Balanced Pb-Ca grid for improved recombination efficiency	ABS (UL94-V0 optional)	Flame Si-Rubbeand aging resistancer	Female Copper Insert M8(torque:7 ~9N.m)	Advanced AGM separator for high pressure cell design	Dilute high purity sulphuric acid	Two layers epoxy resin seal

MCA Battery Manufacture Co.,Ltd.

Cangjiang Industrial Estate Gaoming District Foshan City China
Tel: +86-757-66852610 Fax: +86-757-66852601

Copyright©2020 MCA Battery Manufacture Co.,Ltd.