


SOLRA SERIES VRLA BATTERY

The Solar series is designed for frequent cyclic charge and discharge applications under extreme environments. By combining the newly developed Nano Gel electrolyte with high density paste, the Solar series offers high recharge efficiency at very low charge current. The acid stratification is highly reduced by adding Nano Gel. This series is suit for energy storage for renewable energies such as PV, wind turbine power systems and CATV.

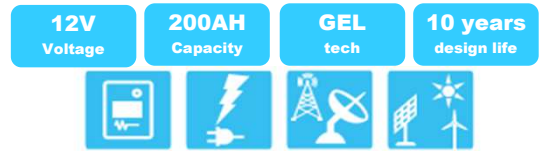

TECHNICAL SPECIFICATIONS


Nominal Voltage (V)	12
Nominal Capacity(25°C)	200Ah @ 10HR-rate (to 1.80Vpc)
Dimension(mm)	L522×W240×H218×TH223
Approx.Weight	59kg
Internal Resistance	Approx.4mΩ
Max.Charge Current	50A
Max.Discharge Current (5S)	2000A
Short Circuit Current	3700A
Self Discharge	Approx. 2.5% per month @ 20°C
Ambient Temperature	Discharge:-25~60°C Charge: -25~50°C Storage: -25~45°C
Float Charge Voltage	13.50~13.80V@25°C(-3mv/Cell/°C)
Equalize and cycle Use Charge Voltage	14.10~14.40V @25 C
Designed Floating Life (25 C)	10Years
Container Material	ABS(UL94-V0 Optional)



Complied standards

- IEC 60896-21/22
- GB/T19638
- IEC61427
- JIS C8704
- BS6290 part 4

BATTERY DIMENSIONS

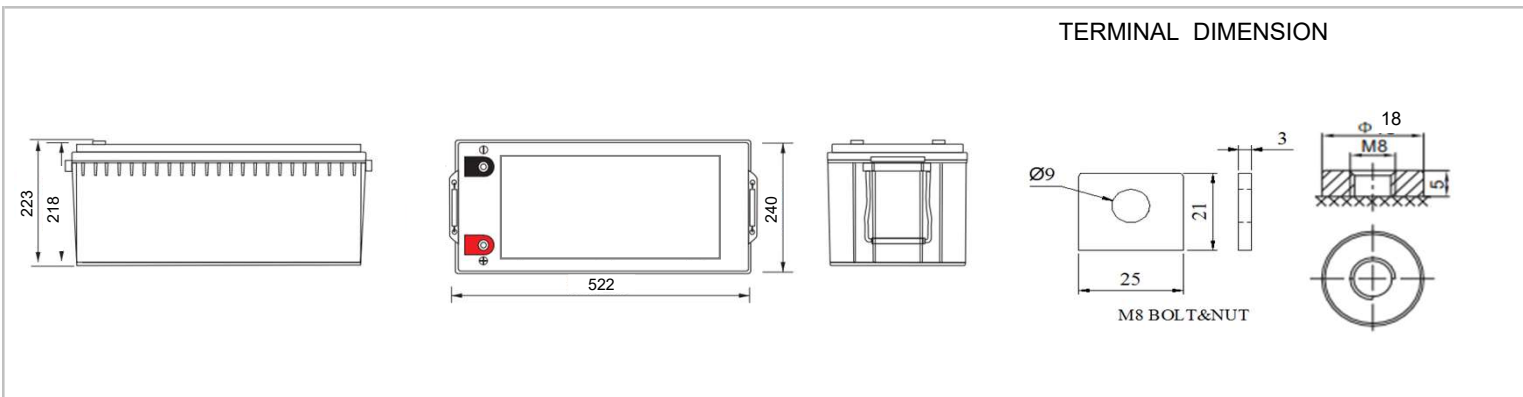

BATTERY DISCHARGE TABLE

Constant Current Discharge Characteristics: Amps (25°C)								
F.V/Time	30min	1h	3h	4h	5h	8h	10h	20h
9.60V	215.3	127.4	54.0	43.2	36.6	25.4	21.3	11.3
10.20V	207.3	121.9	52.2	41.9	35.5	24.9	21.0	11.1
10.50V	199.8	117.9	51.0	41.0	34.8	24.5	20.6	11.0
10.80V	188.0	111.2	48.9	39.6	33.6	23.8	20.0	10.7
11.10V	168.0	99.7	45.5	37.2	31.6	22.2	19.1	10.3

Constant Power Discharge Characteristics: Watts (25°C)								
F.V/Time	30min	1h	3h	4h	5h	8h	10h	20h
9.60V	2349.2	1440.6	616.9	495.1	420.0	293.3	246.0	131.1
10.20V	2291.5	1385.3	600.1	482.9	410.4	289.0	244.2	130.0
10.50V	2225.9	1345.4	588.8	474.9	403.8	285.6	241.0	128.4
10.80V	2115.9	1273.2	567.1	460.7	391.7	278.4	234.8	125.9
11.10V	1913.2	1148.1	529.8	435.3	369.5	261.7	224.5	121.8

PARAMETERS FOR SOLAR & WIND APPLICATIONS







Long time discharge capacity for Solar & Wind applications

Capacity(Ah)	C ₂₄	C ₄₈	C ₇₂	C ₁₀₀	C ₁₂₀
Solar12-200	206.6	220.0	230.0	232.0	236.0
Final Voltage	1.85V				

Solar & Wind applications parameters settings

Over voltage disconnect:	2.45±0.01V/cell @ 25°C
Regulation/equalize voltage:	2.40±0.01V/cell @ 25°C
Array roconnection voltage:	2.25±0.005V/cell @ 25°C
Float voltage setting:	2.27±0.005V/cell @ 25°C
Low voltage alarm voltage:	1.95±0.005V/cell @ 25°C
Low voltage disconnect:	1.90±0.005V/cell @ 25°C
Load reconnect voltage:	2.09±0.01V/cell @ 25°C
Temp. compensate coefficienty:	-5mV/cell/°C

CHARACTERISTICS

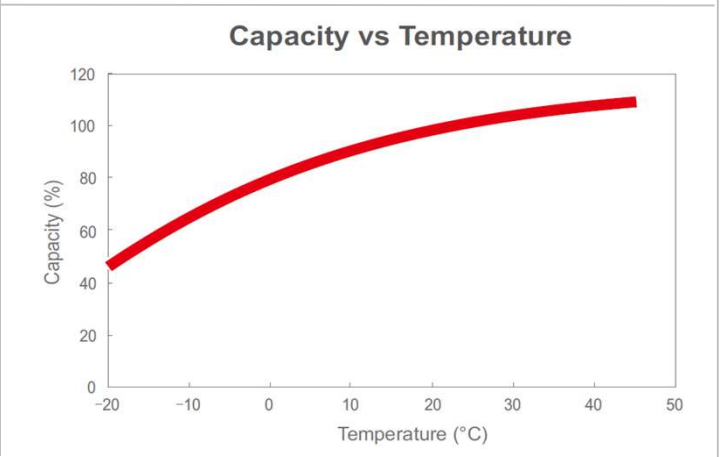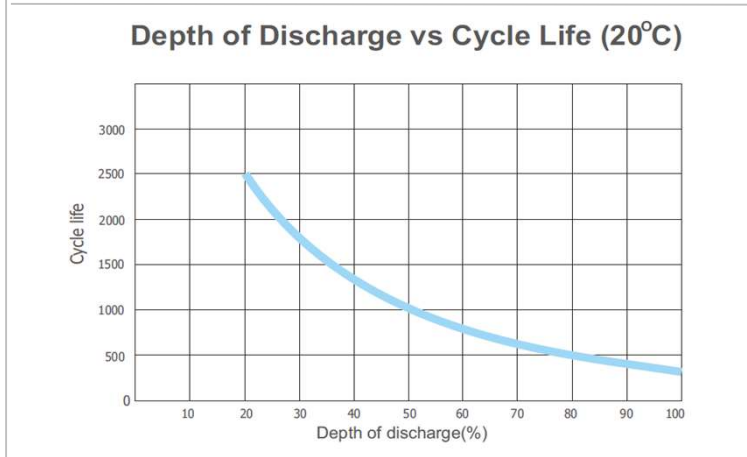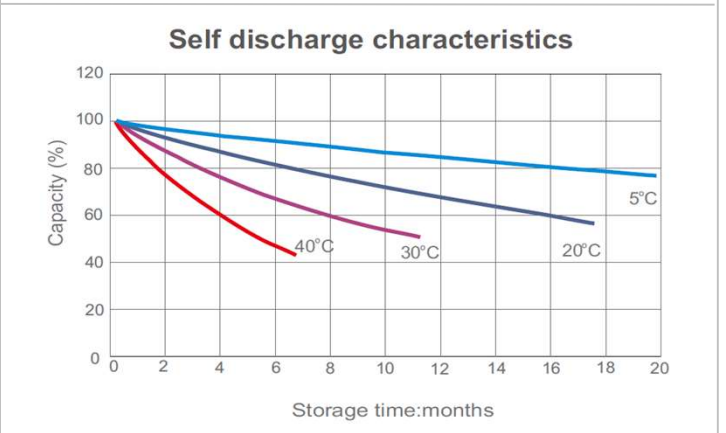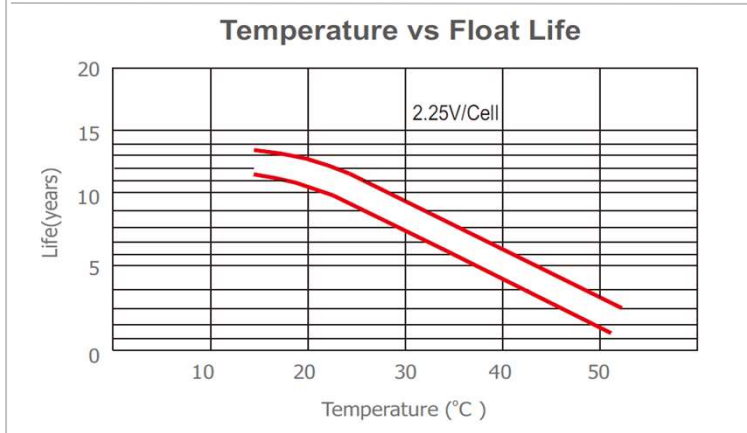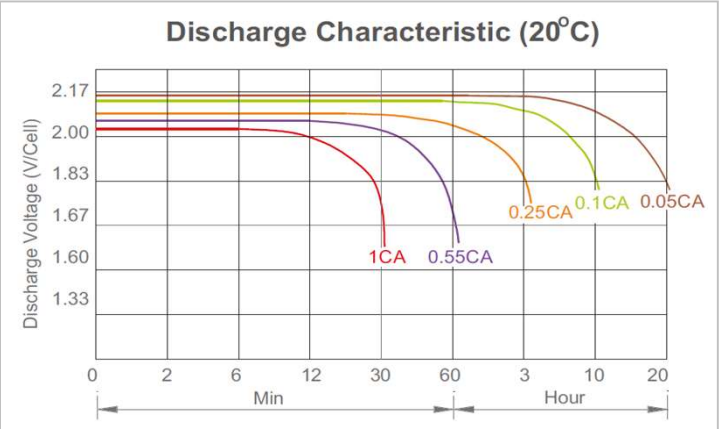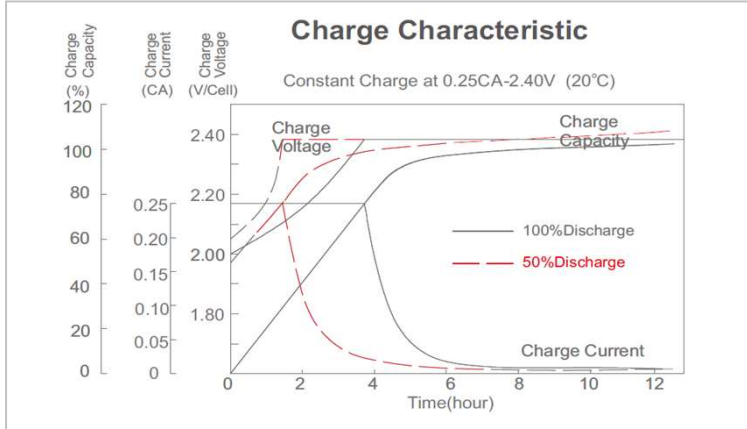

FINAL VOLTAGE SETTINGS RECOMMENDED ACCORDING TO THE DISCHARGE CURRENT

Discharge Current I (A)	$I \leq 0.08C$	$0.08C \leq I < 0.2C$	$0.2C \leq I < 0.6C$	$0.6C \leq I < 1.0C$	$I \geq 1.0C$
Final of Voltage	$\geq 1.85V_{pc}$	$\geq 1.80V_{pc}$	$\geq 1.75V_{pc}$	$\geq 1.70V_{pc}$	$\geq 1.60V_{pc}$

SHENZHEN CHAOWEI RENEWABLE ENERGY CO., LTD.

Unit 1815, 18th Floor, Xusheng Building, No. 4004 Baoan Street, Baoan District, Shenzhen, China.

www.chaoweipower.com