

## Specifications


Model NO.	YTX20L-BS	
Same Dimensions As YUASA Model	YTX20L-BS	
Nominal Voltage	12V	
Rated Capacity(10 hours rate)	18 AH	
Dimension	Length	175 mm (6.89 inches)
	Width	87 mm (3.43 inches)
	Height	155 mm (6.10 inches)
	Total Height	155 mm (6.10 inches)
Approx. Weight W/O . ACID	4.81 kg (10.43 Lbs)	
Approx. ACID Per Battery	0.89 L	
Charge Current (A)	1.8 A	

## Characteristics

Capacity 25°C (77°F)	10hours rate (1.8 A to 10.5V)	18 Ah	
	5hours rate (3.6 A to 10.2V)	15.3 Ah	
	1C (18 A to 9.6V)	8.1 Ah	
	3C (54 A to 9.6V)	6.48 Ah	
Cold Cranking Amperes(-18°C SAE Standard)		210 A	
Cold Cranking Amperes(-18°C EN Standard)		315 A	
Internal Resistance (at 1KHz)		Approx. 7.0m Ω	
Operating Temperature Range	Charge	0°C (32°F) to 40°C (104°F)	
	Discharge	-15°C (5°F) to 50°C (122°F)	
	Storage	-15°C (5°F) to 40°C (104°F)	
Life Expectancy (Cycle Use)	100% depth of discharge 200 cycles		
	80% depth of discharge 225 cycles		
	50% depth of discharge 500 cycles		
Charge Retention (shelf life) at 20°C (68°F)	1 month	92%	
	3 month	90%	
	6 month	80%	
Standby Use	3~5 years		
Case Material	PP		



## Dimensions

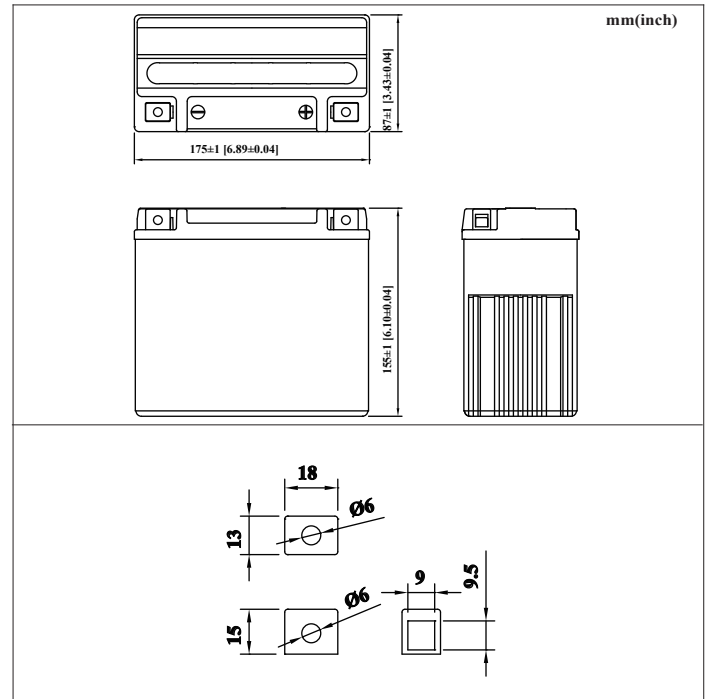

(V) FOR 12V BATTERY

Discharge Time VS. Discharge Current (25°C)

